


QM-DMPETF: Double matte PET film

This extremely durable, yet semi-soft PET film is great for printing architectural designs and blueprint overlays. Much more durable than traditional vellum, this PET film will hold up better in rugged situations and job sites. Our coating is formulated specifically for high speed print systems and is approved for the Hp PageWide XL.

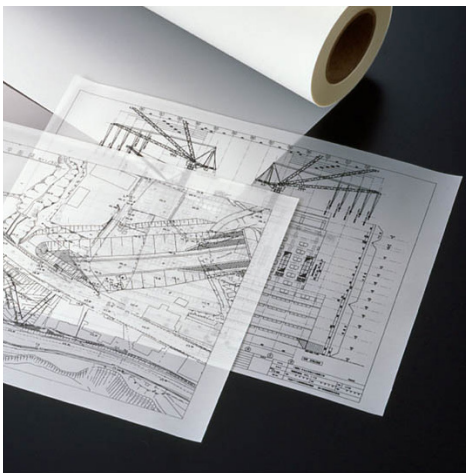

Benefits:

- Semi-Transparent
- Rich Frosted Finish
- Easy to Handle
- Instant Dry Coating

Applications:

- Blueprint Overlays
- Architectural Designs
- CAD Drawings
- Craft Projects

TECHNICAL DATA: QM-DMPETF – DOUBLE MATTE PET FILM

SURFACE FINISH:	Matte	OPACITY:	53
BASE MATERIAL:	Hybrid Film	STORAGE:	Indoor, 1 yr. between 50-80°
BASE WEIGHT:	135 GSM +/- 10%	ROLL LENGTH:	100 FT.
CALIPER:	5 Mil +/- 1	ROLL WIDTHS:	36"
BRIGHTNESS:	65 (ISO Blue Whiteness)	CORE:	3"
WHITENESS:	100 (CIE Ganz)	PRINT SIDE:	Print Side Out
GLOSS MEASUREMENT:	2.4 +/- 10% by angle of 60°	INK RECOMMENDATIONS:	AQUEOUS LATEX UV



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly.

