




Magnate

Solvent, Eco Solvent, Latex, UV Media




QM-ECOWV: 70/30 Perforated Vinyl w/ Dual Liner

The 70/30% perforation pattern allows for the maximum print surface, making it ideal for all retail exterior-mount window graphics requiring small detail and text. Clear adhesive, removable up to one year. The dual perforated paper liner protects printer beds. Up to 2 years outdoor durability (unprinted).

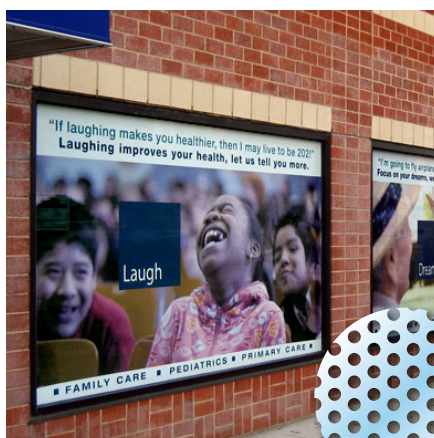

Hole Size: 1.6mm, Perf Ratio of 30%



Benefits:

- 70% Print Surface for Detailed Graphics
- 30% View Through

Applications:

- POP Decals
- Retail and Commercial Window Signage

Registered Latex Developer



TECHNICAL INFORMATION: QM-ECOWV – 70/30 PERFORATED VINYL W/ DUAL LINER

SURFACE FINISH:	Gloss	BRIGHTNESS:	74 (ISO Blue Whiteness)
BASE MATERIAL:	PVC	WHITENESS:	80 (CIE Ganz)
BASE SIDE DESCRIPTION:	White Surface/Black Back	GLOSS MEASUREMENT:	46 +/- 10 by angle of 60°
ADHESIVE MATERIAL:	Clear Removable PSA	STORAGE LIFE:	1 yr. at 75° and 50-60% RH
LINER MATERIAL:	Single-side PE coated White Wood-pulp Paper	ROLL LENGTH:	164 Ft.
LINER WEIGHT:	183 GSM +/- 10%	ROLL WIDTHS:	38", 54", 60"
LINER CALIPER:	9 Mil +/- 1	CORE:	3"
FACE STOCK WEIGHT:	182 GSM +/- 10%	PRINT SIDE:	Print Side Out
FACE STOCK CALIPER:	7 Mil +/- 1	INK RECOMMENDATIONS:	ES ECO-SOLVENT L LATEX * UV UV

*Accepts a maximum of 200% ink flow for UV print systems



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly.