




## QM-NAPETPERF: Premium matte WR perforated film without adhesive

This non-adhesive PET perforated film was designed to hang on any store front or glass display and retain its dimensional stability. The ultra strong and stable polyester film will not shrink and resists stretching unlike the PVC counterpart. Our 70/30 ratio is the ultimate choice for store front advertising with detailed graphics and visible smaller text.

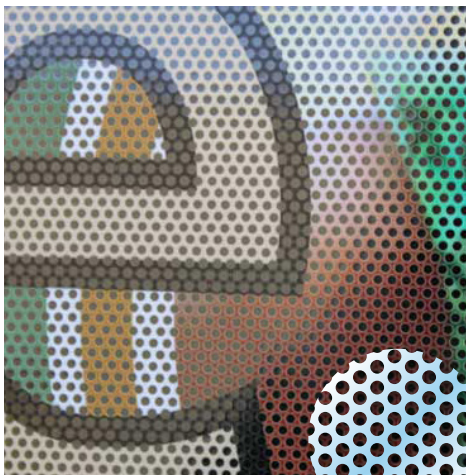

Hole Size: 1.5 mm, Perf Ratio of 70%

### Benefits:

- Good Rigidity for Easy Application
- Easy Tear-Resistant Removal
- Will Not Shrink
- Stretch & Weather Resistant

### Applications:

- Windows
- POS Advertisements
- POP Signage
- Hanging Installations
- Contour Cutting

Registered Latex Developer



#### TECHNICAL DATA: QM-NAPETPERF – PREMIUM MATTE WR PERFORATED FILM WITHOUT ADHESIVE

|                     |                         |                      |                              |
|---------------------|-------------------------|----------------------|------------------------------|
| SURFACE FINISH:     | Matte                   | GLOSS MEASUREMENT    | 3 +/- 10% by angle of 60°    |
| BASE MATERIAL:      | PET                     | OPACITY:             | 30% view through             |
| LINER MATERIAL:     | PET                     | STORAGE:             | Indoor 2 yrs. between 50-80° |
| LINER WEIGHT:       | 100 GSM +/- 10%         | ROLL LENGTH:         | 75 FT.                       |
| LINER CALIPER:      | 3 Mil                   | ROLL WIDTHS:         | 36"                          |
| FACE STOCK WEIGHT:  | 160 GSM +/- 10%         | CORE:                | 3"                           |
| FACE STOCK CALIPER: | 7 Mil +/- 1             | PRINT SIDE:          | Print Side Out               |
| BRIGHTNESS:         | 98 (ISO Blue Whiteness) | INK RECOMMENDATIONS: | AQUEOUS  LATEX               |
| WHITENESS:          | 140 (CIE Ganz)          |                      |                              |



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly.

