




## QM-TASQUE: UL410 (SA34033) matte anti-slip white vinyl w/ removable adhesive

Maximize advertising space by adding graphics in non-traditional high traffic areas. This high quality, budget-friendly film can be used on smooth surfaces for promotions such as, floor graphics, table surfaces, and POP. Matte finish extruded vinyl for slip resistance. Removable up to 3 months.

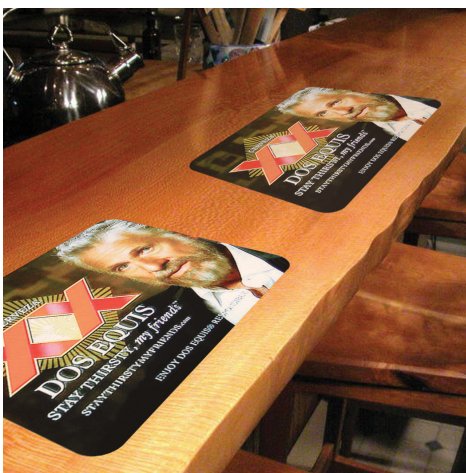

### Benefits:

- Water Resistant
- Easy to Apply
- Scratch Resistant
- Slip Resistant

### Applications:

- Floors
- Table Tops
- Counter Displays

Registered Latex Developer



#### TECHNICAL DATA: QM-TASQUE - UL410 (SA34033) MATTE ANTI-SLIP WHITE VINYL W/ REMOVABLE ADHESIVE

SURFACE FINISH:	White Textured Matte	WHITENESS:	105 (CIE Ganz)
BASE MATERIAL:	Vinyl	OPACITY:	100
ADHESIVE MATERIAL:	Solvent Acrylic Removable Adhesive	GLOSS MEASUREMENT:	5 +/- 10% by angle of 60°
LINER MATERIAL:	Coated Paper Liner	DURABILITY:	<i>Indoor:</i> Up to 1 year <i>Outdoor:</i> Up to 6 months
LINER WEIGHT:	120 GSM +/- 10%	ROLL LENGTH:	150 Ft.
LINER CALIPER:	7 Mil +/- 1	ROLL WIDTHS:	38", 54" & 60"
FACE STOCK WEIGHT:	260 GSM +/- 10%	CORE:	3"
FACE STOCK CALIPER:	8 Mil +/- 1	PRINT SIDE:	Print Side Out
BRIGHTNESS:	90 (ISO Blue Whiteness)	INK RECOMENDATIONS:	ECO-SOLVENT  LATEX  UV

STORAGE: Up to six months if stored in proper conditions (cool, dry place 50-80°)



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)

