




Matte WR perforated vinyl w/ adhesive for glass

Perfect for windows, glass and any other transparent surfaces. This 8 mil white PVC with black back and clear removable acrylic adhesive, allows for clean removal for up to 6 months. With a top matte, inkjet coating for water resistance and bold graphics. The stay-flat liner allows for easy installation.

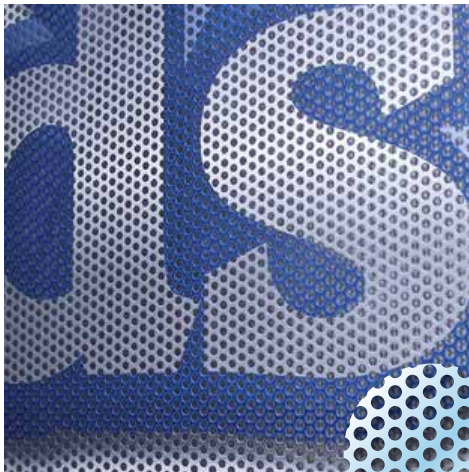

Hole Size: 1.5 mm, Perf Ratio of 70%


Benefits:

- 70% Printable Vinyl for Bold Graphics
- Clean Removal for 6 Months
- Stay Flat Paper Liner
- Made for Inkjet Printers

Applications:

- Window Advertising
- Decals
- POP Signage
- Security View Through Prints

TECHNICAL DATA: MATTE WR PERFORATED VINYL W/ ADHESIVE FOR GLASS

SURFACE FINISH:	Matte	GLOSS MEASUREMENT	3 +/- 10% by angle of 60°
BASE MATERIAL:	PVC	OPACITY:	30% view through
LINER MATERIAL:	Double Sided PE Coated	DURABILITY:	Indoor: Up to 1 year Outdoor: Up to 6 months
LINER WEIGHT:	120 GSM +/- 10%	ROLL LENGTH:	50 FT. & 75 FT.
LINER CALIPER:	5 Mil	ROLL WIDTHS:	36" & 60"
FACE STOCK WEIGHT:	140 GSM +/- 10%	CORE:	2"
FACE STOCK CALIPER:	8 Mil +/- 1	PRINT SIDE:	Print Side Out
BRIGHTNESS:	95 (ISO Blue Whiteness)	INK RECOMMENDATIONS:	 AQUEOUS
WHITENESS:	134 (CIE Ganz)	STORAGE:	Up to six months if stored in proper conditions (cool, dry place 50-80°)



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets, actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)