




# Magnate

Eco Solvent, Latex, UV Media



## QM-6040.OWVCL: Perforated vinyl 60/40 ratio w/ removable adhesive dual liner

This 60% print surface, white face and black back perforated film is designed for vivid store-front graphic visibility with added view through percentage, so better view of outside customers can be achieved. The thicker 8mil vinyl stretches less and is easier to handle than economy products. Its dual OPP clear liner absorbs ink so your hands stay clean during installation. Twice the standard perforated hole depth to work with Eco-Solvent, UV, and Latex print platforms.

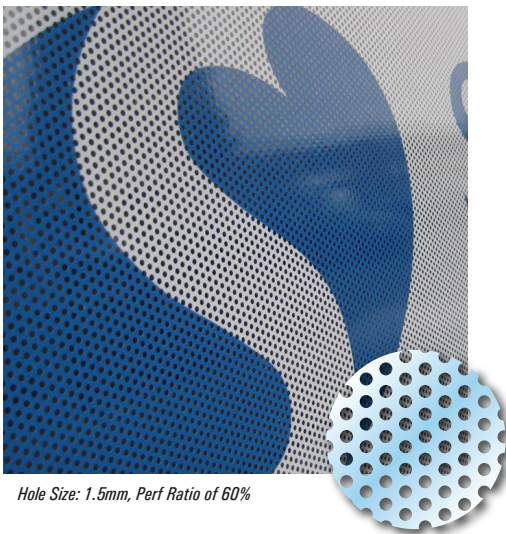

Hole Size: 1.5mm, Perf Ratio of 60%

### Benefits:

- 8mil Thickness for Less Stretch
- Dual OPP Clear Liner for Clean Installations
- 60% Print Surface

### Applications:

- POP Decals
- Retail and Commercial Window Signage
- Glass Doors



#### TECHNICAL DATA: QM-6040.OWVCL – PERFORATED VINYL 60/40 RATIO W/ REMOVABLE ADHESIVE DUAL LINER

SURFACE FINISH:	Gloss	BRIGHTNESS:	75 (ISO Blue Whiteness)
BASE MATERIAL:	PVC	WHITENESS:	80 (CIE Ganz)
BASE SIDE DESCRIPTION:	White Surface/Black Back	GLOSS MEASUREMENT:	46 +/- 10 by angle of 60°
ADHESIVE MATERIAL:	Clear Removable PSA	DURABILITY:	Indoor: Up to 1 year Outdoor: Up to 6 months
LINER MATERIAL:	OPP w/ White Wood-Pulp Paper	ROLL LENGTH:	164 Ft.
LINER WEIGHT:	105 GSM +/- 10%	ROLL WIDTHS:	38"; 54"; 60"
LINER CALIPER:	6 Mil +/- 1	CORE:	3"
FACE STOCK WEIGHT:	160 GSM +/- 10%	PRINT SIDE:	Print Side Out
FACE STOCK CALIPER:	8 Mil +/- 1	INK RECOMENDATIONS:	ES ECO-SOLVENT L LATEX * UV UV
STORAGE: Up to six months if stored in proper conditions (cool, dry place 50-80°)			

\*Accepts a maximum of 200% ink flow for UV print systems



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)

