




**QM-LAMMT:**

**Matte pressure sensitive lamination film with liner**

Everyday pressure sensitive laminate with “cold” permanent adhesive. This 4 mil PVC base works well with almost any media type, unlike heat-assisted laminates.

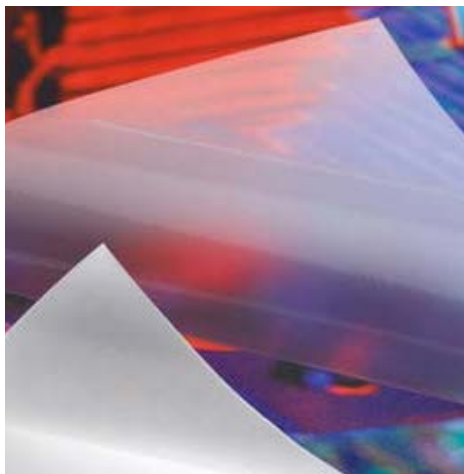

**Benefits:**

- Ultra Clear Visibility
- Waterproof
- Protects Graphics
- Non Glare Textured Matte Finish

**Applications:**

- Indoor Signage
- High Traffic Advertising
- Short Term Outdoor Signage
- Menus

**TECHNICAL DATA:**

|                    |   |                      |  |
|--------------------|---|----------------------|--|
| SURFACE FINISH:    | Matte   | FACE STOCK CALIPER:  | 4 Mil +/- 1  |
| BASE MATERIAL:     | Monomeric PVC   | DURABILITY:          | Expected outdoor exposure is 1 year+ under normal conditions |
| ADHESIVE MATERIAL: | Permanent Solvent Acrylic   | ROLL LENGTH:         | 150 Ft.  |
| LINER MATERIAL:    | Kraft w/ PE Coating One Side  | ROLL WIDTHS:         | 38", 43", 51", 54", & 61"                                    |
| LINER WEIGHT:      | 80 GSM +/- 10%  | CORE:                | 3"   |
| LINER CALIPER:     | 4 +/- 1 Mil   | PRINT SIDE:          | Print Side Out   |
| FACE STOCK WEIGHT: | 105 GSM +/- 10%   | INK RECOMMENDATIONS: | N/A  |
| STORAGE LIFE:      | Up to 1-year shelf life when stored at 70°F and 50% relative humidity |                      |  |



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)

