




QM-LAMTXT6:

Textured pressure sensitive lamination film with liner

Everyday heavy pressure sensitive laminate with “cold” permanent adhesive. Can be used for floor graphic installations, This laminate has a texture that has passed ANSI slip testing standards. 6 mil PVC base works well with almost any media type, unlike heat-assisted laminates.

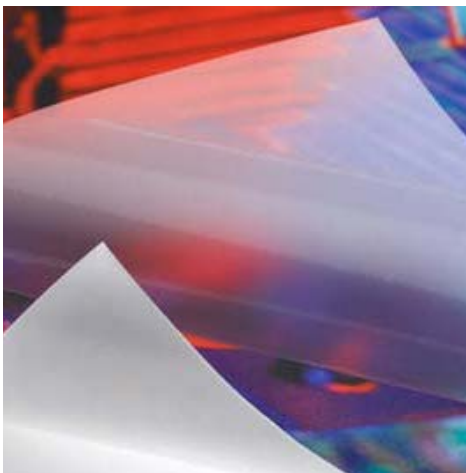

Benefits:

- 6 mil General Purpose Thickness
- Economical
- Ultra Clear Visibility
- Ant-slip Certified

Applications:

- Short Term Interior Floors
- Floor & Counter Top Advertising
- Sealed Concrete Floor Graphics

Registered Latex Developer



TECHNICAL DATA:

SURFACE FINISH:	Textured	FACE STOCK CALIPER:	6 Mil +/- 1
BASE MATERIAL:	PVC	DURABILITY:	Expected outdoor exposure is 1 year+ under normal conditions
ADHESIVE MATERIAL:	Permanent Solvent Acrylic	ROLL LENGTH:	150 Ft.
LINER MATERIAL:	Kraft w/ PE Coating One Side	ROLL WIDTHS:	38", 54" & 61"
LINER WEIGHT:	80 GSM +/- 10%	CORE:	3"
LINER CALIPER:	4 +/- 1 Mil	PRINT SIDE:	Print Side Out
FACE STOCK WEIGHT:	190 GSM +/- 10%	INK RECOMMENDATIONS:	N/A
STORAGE LIFE:	Up to 1-year shelf life when stored at 70°F and 50% relative humidity		



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)

